

Performing a factory reset using Android Recovery mode


In case an Android Panel (e.g. PA15W) needs to be restored to factory defaults, please follow the below instructions:

Locate the uBoot button on the panel.




Press and hold this button while powering on the panel.

After a couple of seconds, you will enter Android Recovery mode.

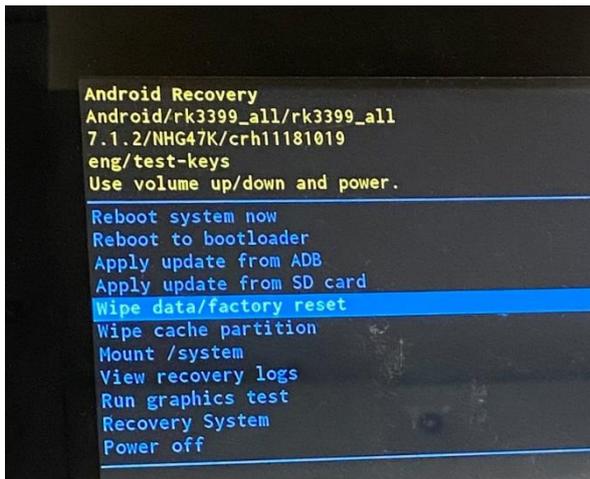

Select "Wipe Data/factory reset", press Enter.

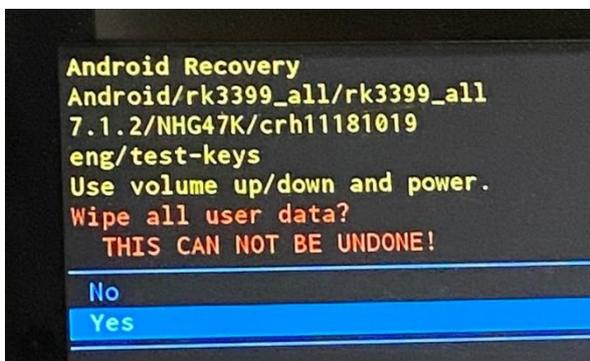


Select Yes, and press Enter to confirm.

```
Supported API: 3
-- Wiping data...
Formatting /data...
Formatting /cache...
Data wipe complete.
```


Progress is shown at the bottom of the screen.

```
Android Recovery
Android/rk3399_all/rk3399_all
7.1.2/NHG47K/crh11181019
eng/test-keys
Use volume up/down and power.
Reboot system now
Reboot to bootloader
Apply update from ADB
Apply update from SD card
Wipe data/factory reset
Wipe cache partition
Mount /system
View recovery logs
Run graphics test
Recovery System
Power off
```


Select "Reboot system now", press Enter.

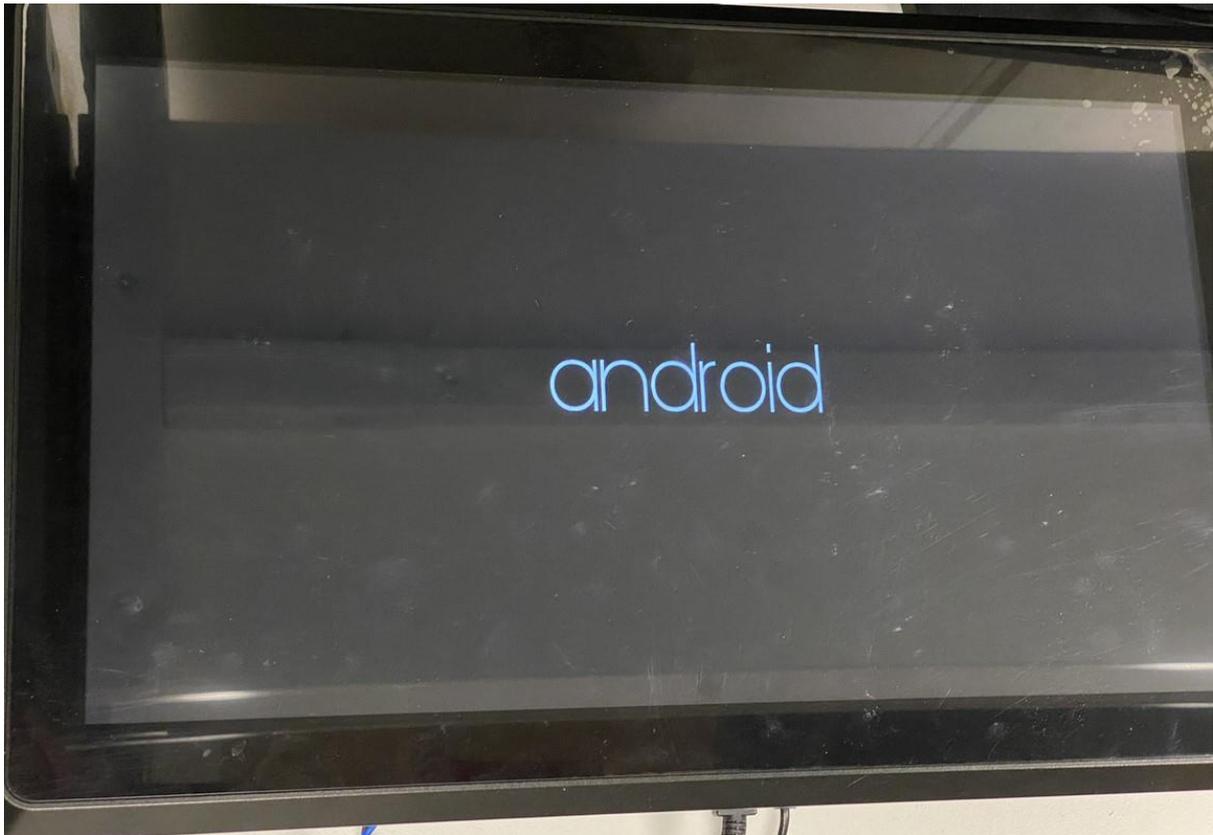

The panel will reboot, using a little extra time to restore the files.

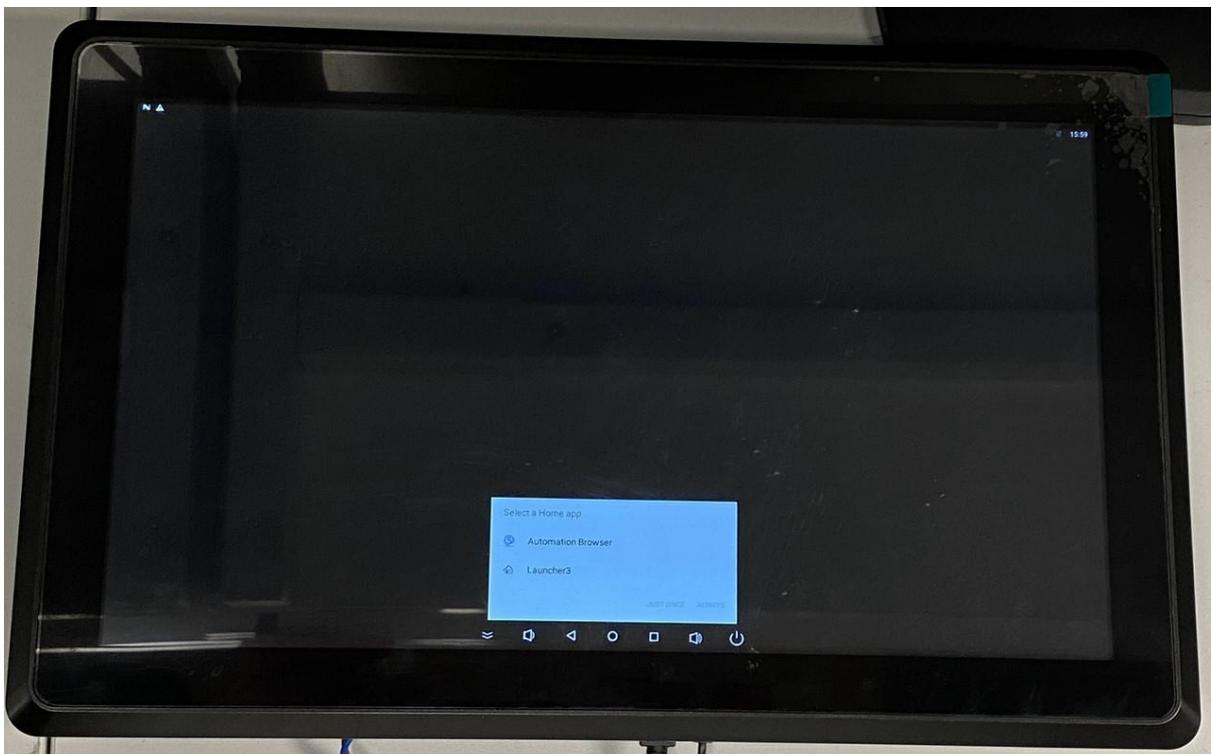

When done, you will see the desktop or a Home app launch menu.

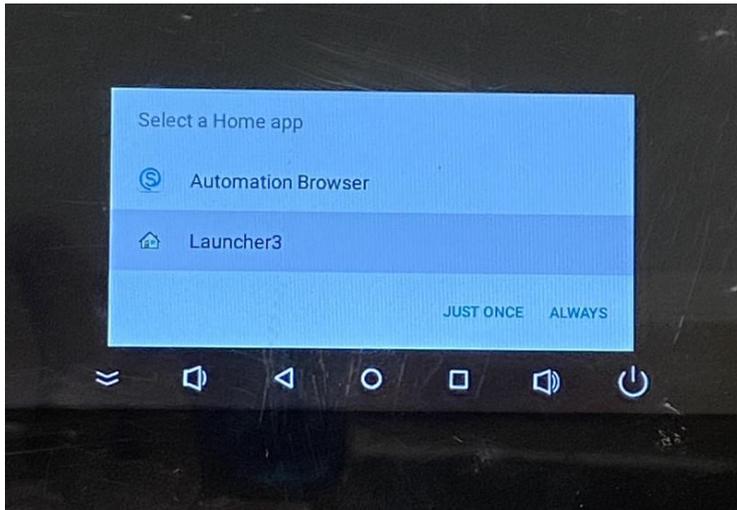

In case you see the above menu, press Launcher3 and Just Once.

Pressing Just Once, will let you choose this every time the panel starts up.

Pressing Always, will prevent this menu to appear, automatically launching the app you chose.